


CA TYPE

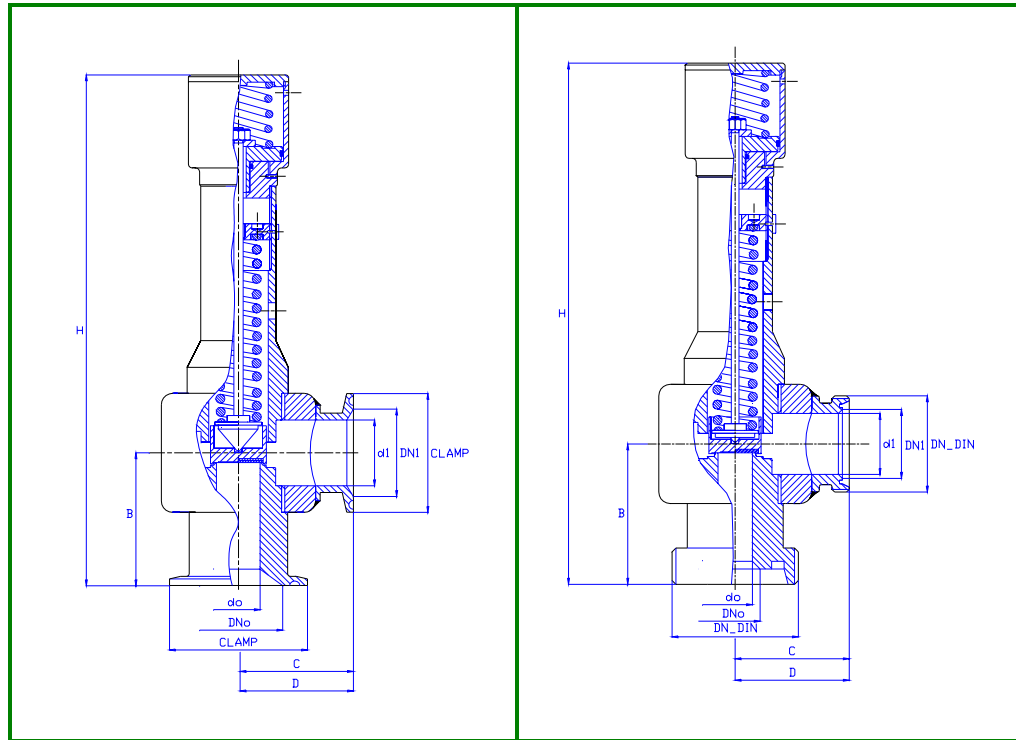

SAFETY VALVES WITH PNEUMATIC ACTUATOR

MATERIALS

EN 12164 CW 614N BRASS

EN 1982 Cu Sn5 Zn5 Pb5 BRONZE

316 L STAINLESS STEEL

OVERPRESSURE 10%

BLOWDOWN 10%

CONNECTIONS TYPE

FOR OTHER DIMENSIONS, SEE STANDARD VALVE TYPE

TYPE	do Ø mm.	d1 Ø mm.	B mm.	C mm.	D Ø mm.	H mm.	WEIGHT Kg.	LIFT mm	SET PRESSURE ADJUSTMENT RANGE bar
S20CA	19.2	26	54	54	60	256	2,800	8	0.4 – 10
S25CA	24.2	32	62	66	72	279	4,200	10	0.4 – 10
S32CA	31.2	38	69	69	79	324	6,500	12	0.4 – 10
S40CA	38	48	77	77	89	362	8,800	14	0.4 – 10